

Grafos Steel S.r.l.
 Via Treves 19/21
 41043 Formigine (MO) ITALY
 Tel. +39.059.57.50.267
 www.grafossteel.it


Title: Digi Inox keyboard; 98 buttons (R17 keycap); front mount; USB+PS/2 interface
 P/N: **DGI.98R17.F**
 Dimensions without indicated tolerances - precision according to: **ISO 2768 F**

Rev:	File:	Drawn:
	DGI.98R17.F (Data-sheet).idw	A. Iosi
Tolerance class	Length (mm)	Approved:
	>0 - 6 ±0.2 ±0.5 ±0.8 ±1.2	
C (Coarse)	>6-30 ±0.2 ±0.3 ±0.5 ±0.8	
M (medium)	>30-120 ±0.1 ±0.15 ±0.2 ±0.3	
F (Fine)	>120-400 ±0.1 ±0.15 ±0.2 ±0.3	

Date: 28/12/2016
 Material: -
 Surface treatment: -


Sheet: 1 Of: 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

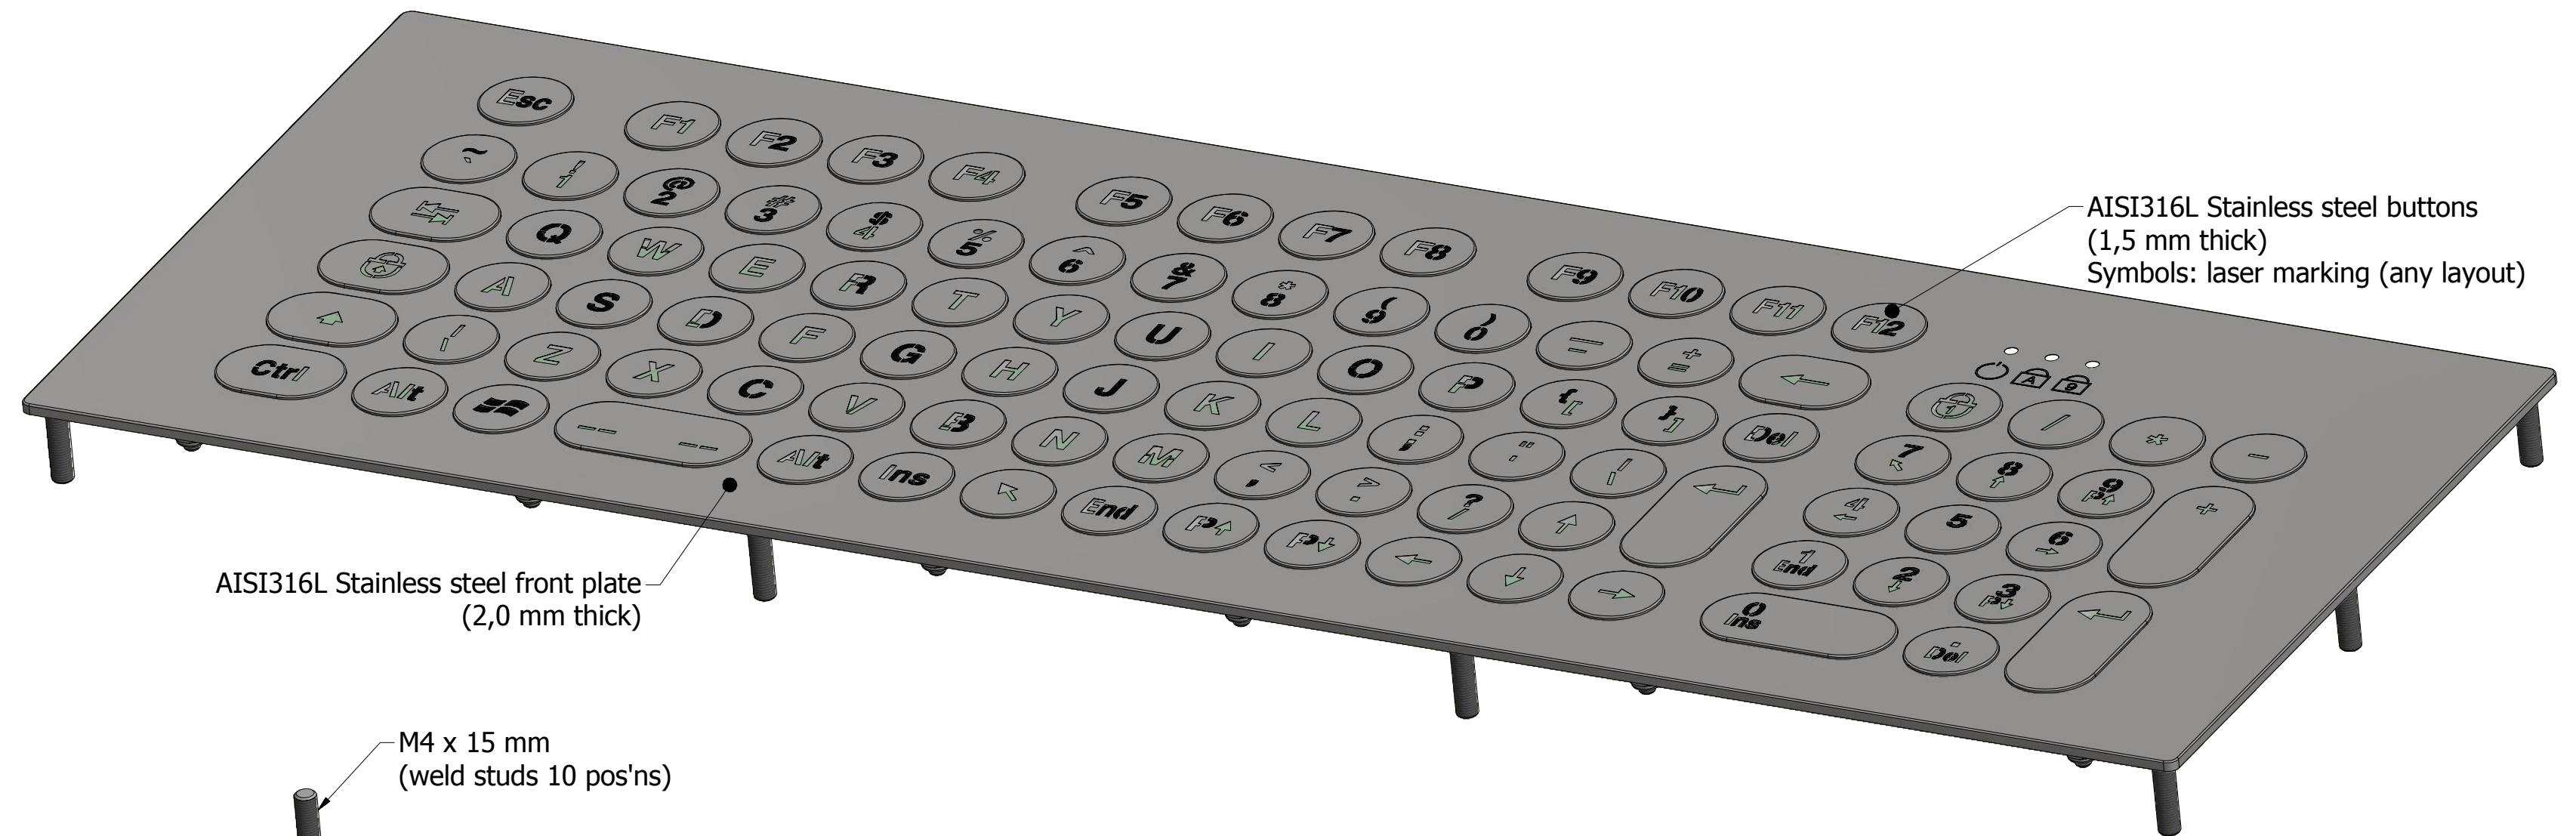

AISI316L Stainless steel buttons
(1,5 mm thick)
Symbols: laser marking (any layout)

AISI316L Stainless steel front plate
(2,0 mm thick)

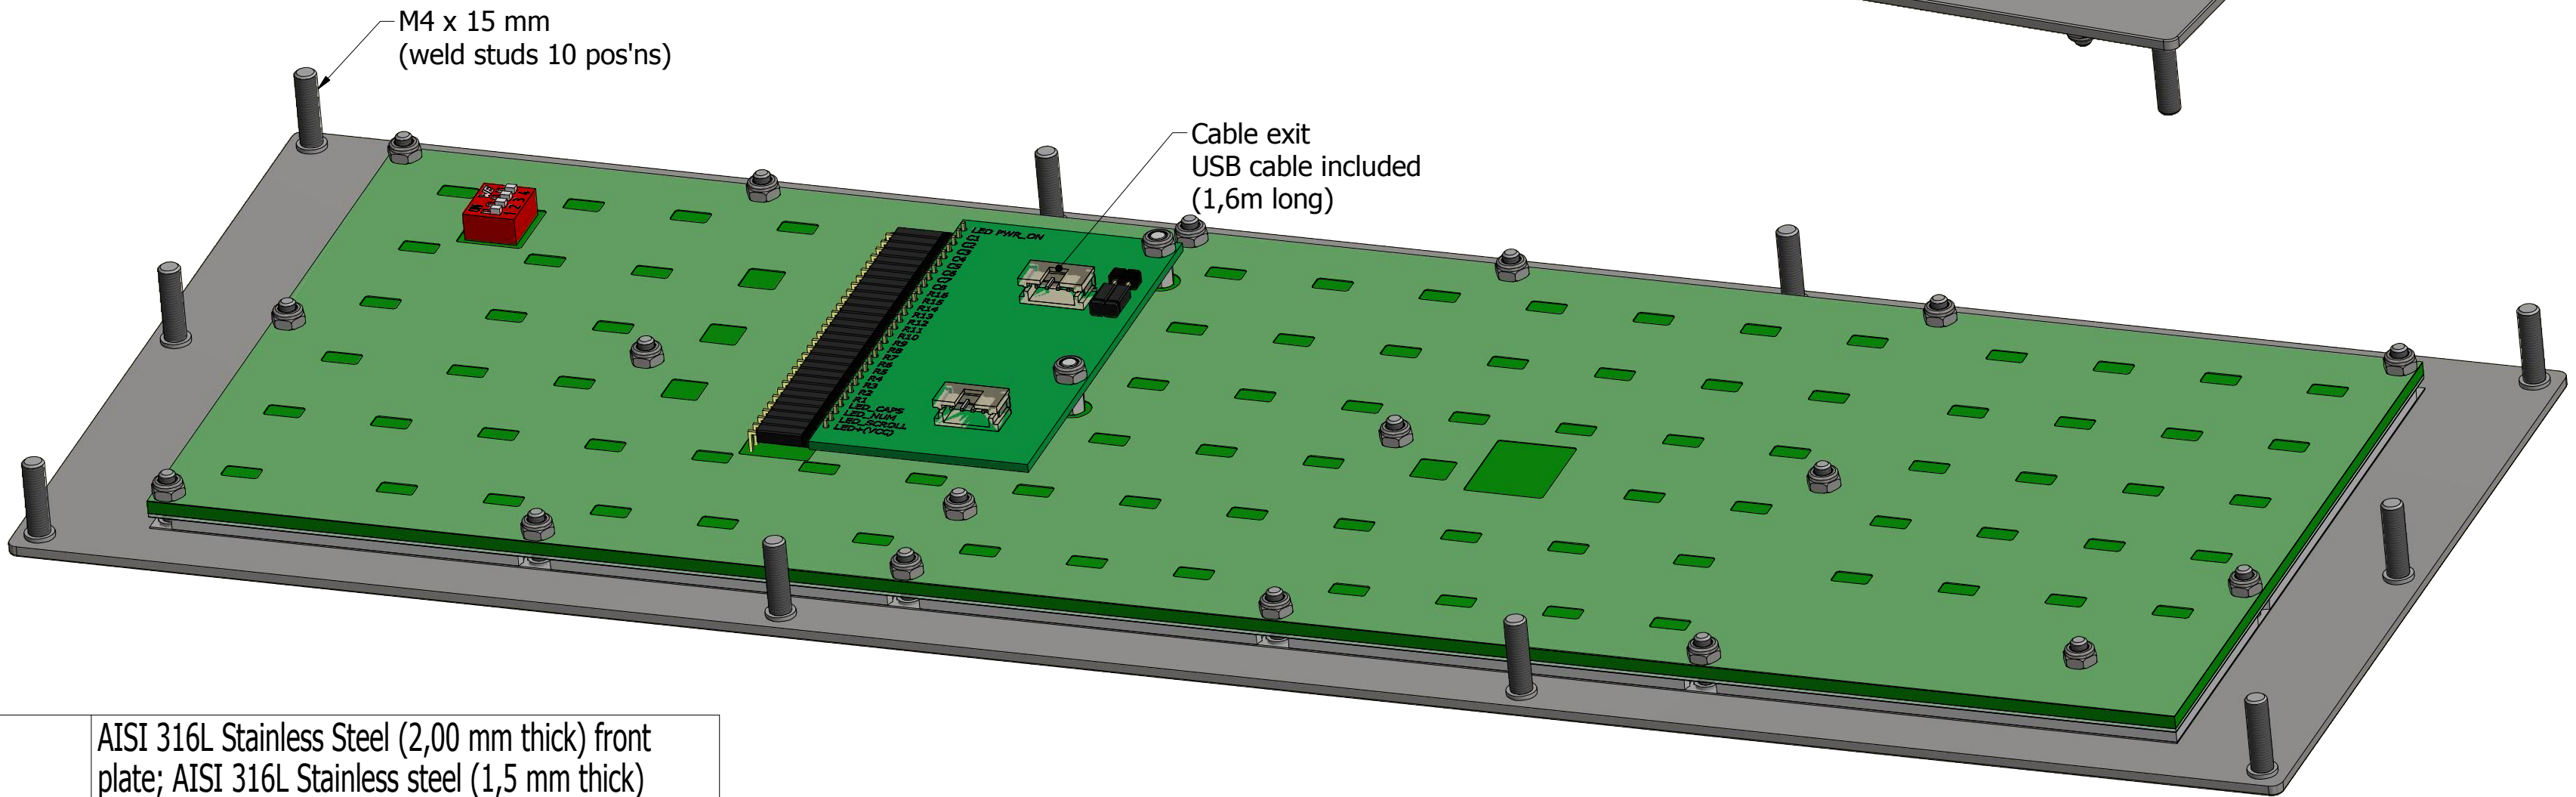

M4 x 15 mm
(weld studs 10 pos'ns)

Cable exit
USB cable included
(1,6m long)

Material	AISI 316L Stainless Steel (2,00 mm thick) front plate; AISI 316L Stainless steel (1,5 mm thick) buttons with built-in silicone rubber sealing gasket
Lettering	Laser marking
Button stroke	0,6 mm +/- 0,1 mm
Actuation force	4,0 N (typical)
Life expectancy	>3.000.000 cycles
IP Protection rate	IP65
Contact technology	Stainless steel metal dome on Gold plated PCB
Connection	USB or PS/2
Operating temperature	-25°/+85°C
Storage temperature	-25°/+85°C

Grafos Steel S.r.l.
Via Treves 19/21
41043 Formigine (MO) ITALY
Tel. +39.059.57.50.267
www.grafossteel.it

Date:
28/12/2016

Material:
-

Title: Digi Inox keyboard; 98 buttons (R17 keycap); front mount; USB+PS/2 interface

P/N:
DGI.98R17.F

Dimensions without indicated tolerances - precision according to:

ISO 2768 F

Rev:


File:
DGI.98R17.F (Data-sheet).idw

Tolerance class	Length (mm)			
	>0 - 6	>6-30	>30-120	>120-400
C (Coarse)	± 0.2	± 0.5	± 0.8	± 1.2
M (medium)	± 0.1	± 0.2	± 0.3	± 0.5
F (Fine)	± 0.05	± 0.1	± 0.15	± 0.2

Drawn:
A.Tosi

Approved:

Sheet: 2 Of: 2



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS