

GRAFOS[®] steel

Master Touch

Data Sheet

DGI.98R17.F-TI

Tastiera 98 tasti rotondi ø17 montaggio fronte pannello con track-ball inox
Front mounting 98 round ø17 keys keyboard with stainless steel track-ball

PATENTED
digi!INOX

IP	65 (54 with TI)
IK	08
Cycles	3.000.000
Operating temp.	-10° to +70°C (0° to +50°C with TI)
Storage temp.	-25° to +85°C (-25° to +55°C with TI)







Quick web link




www.grafossteel.it

Disegni Drawings

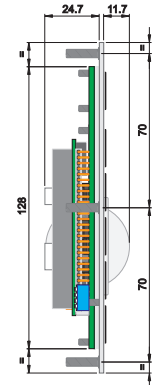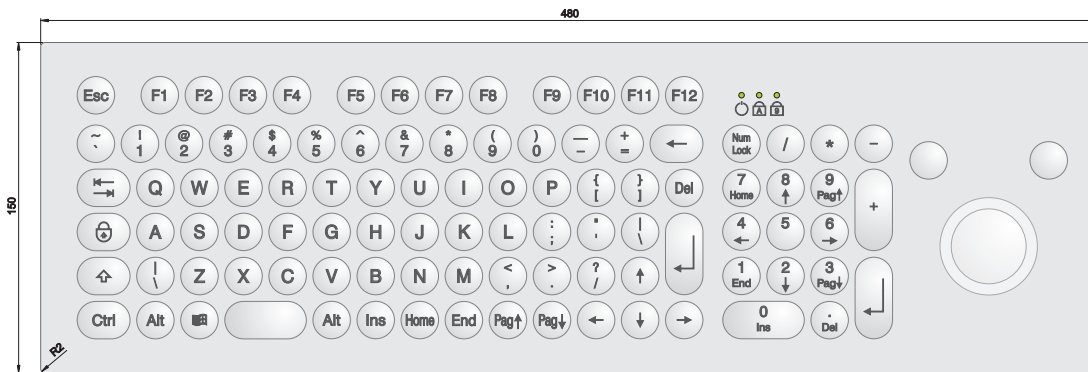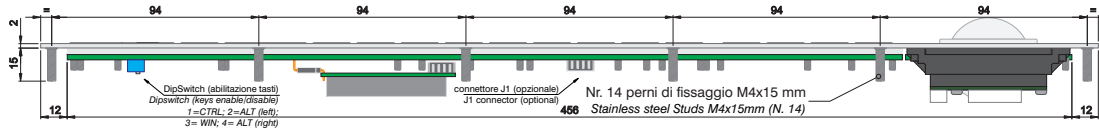

Cutout consigliato Suggested Cut-out

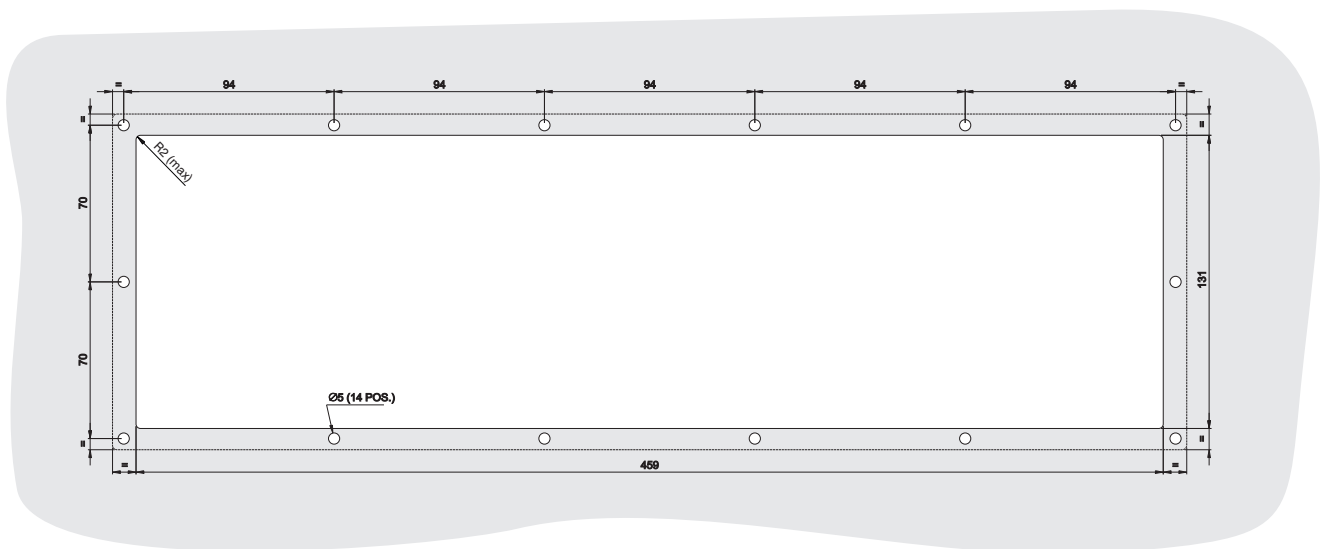

Codifica per l'ordine Order Info

DGI.98R17.F-TI - **y** - **w** - **z**

Es. DGI.98R17.F-TI-M-L-US

W

Marcatura Marking	Connettore Connector	Lingua/layout Language layout
L - Laser	M - MINIDIN PS2	US: QWERTY USA
B - Backlight	U - USB	IT: QWERTY Italy
		DE: QWERTY Germany
		FR: AZERTY France
		ES: Spain

Z