
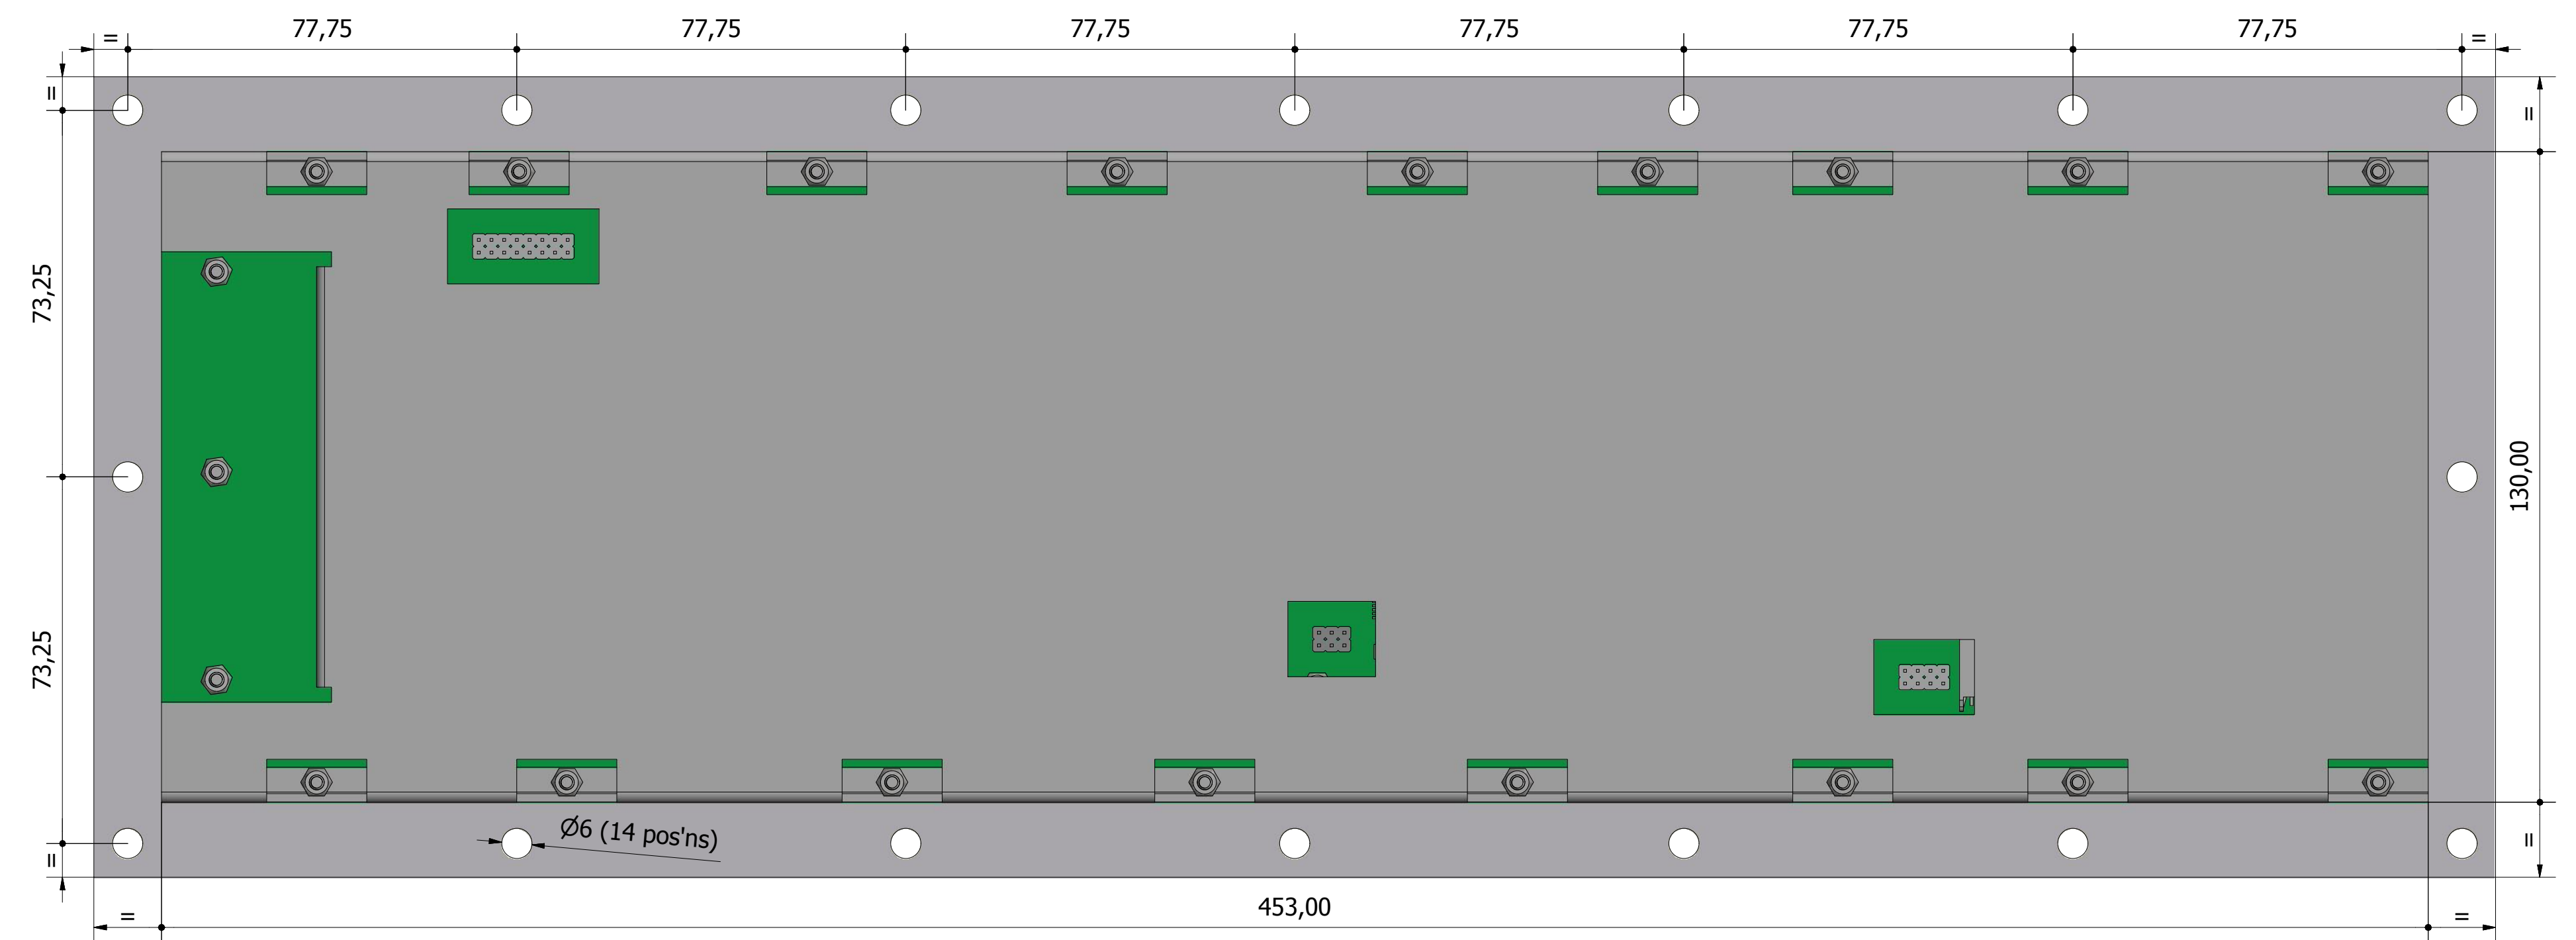
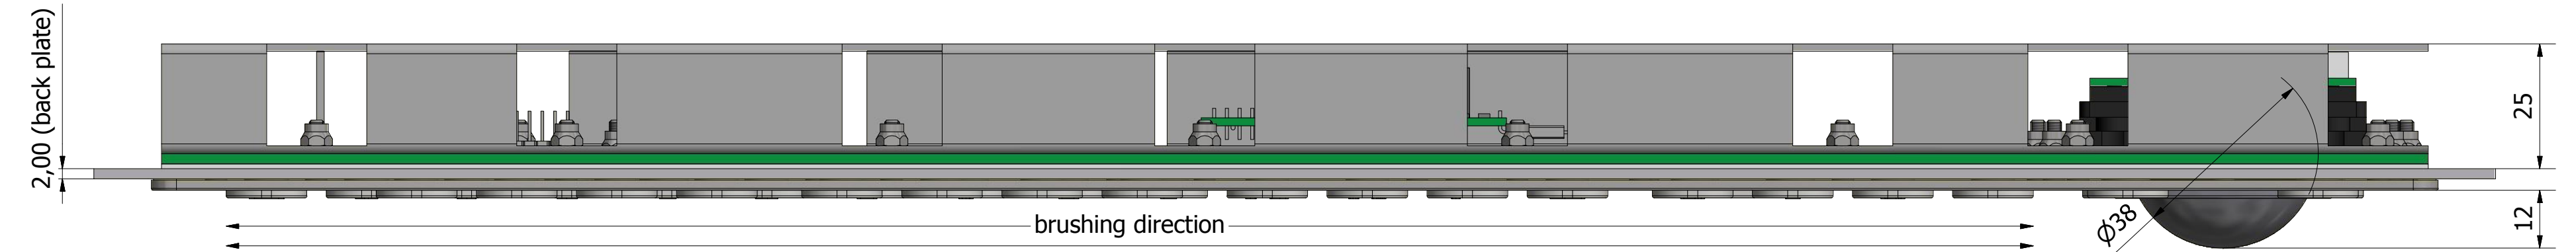



2,00 (front plate)

2,00 (back plate)

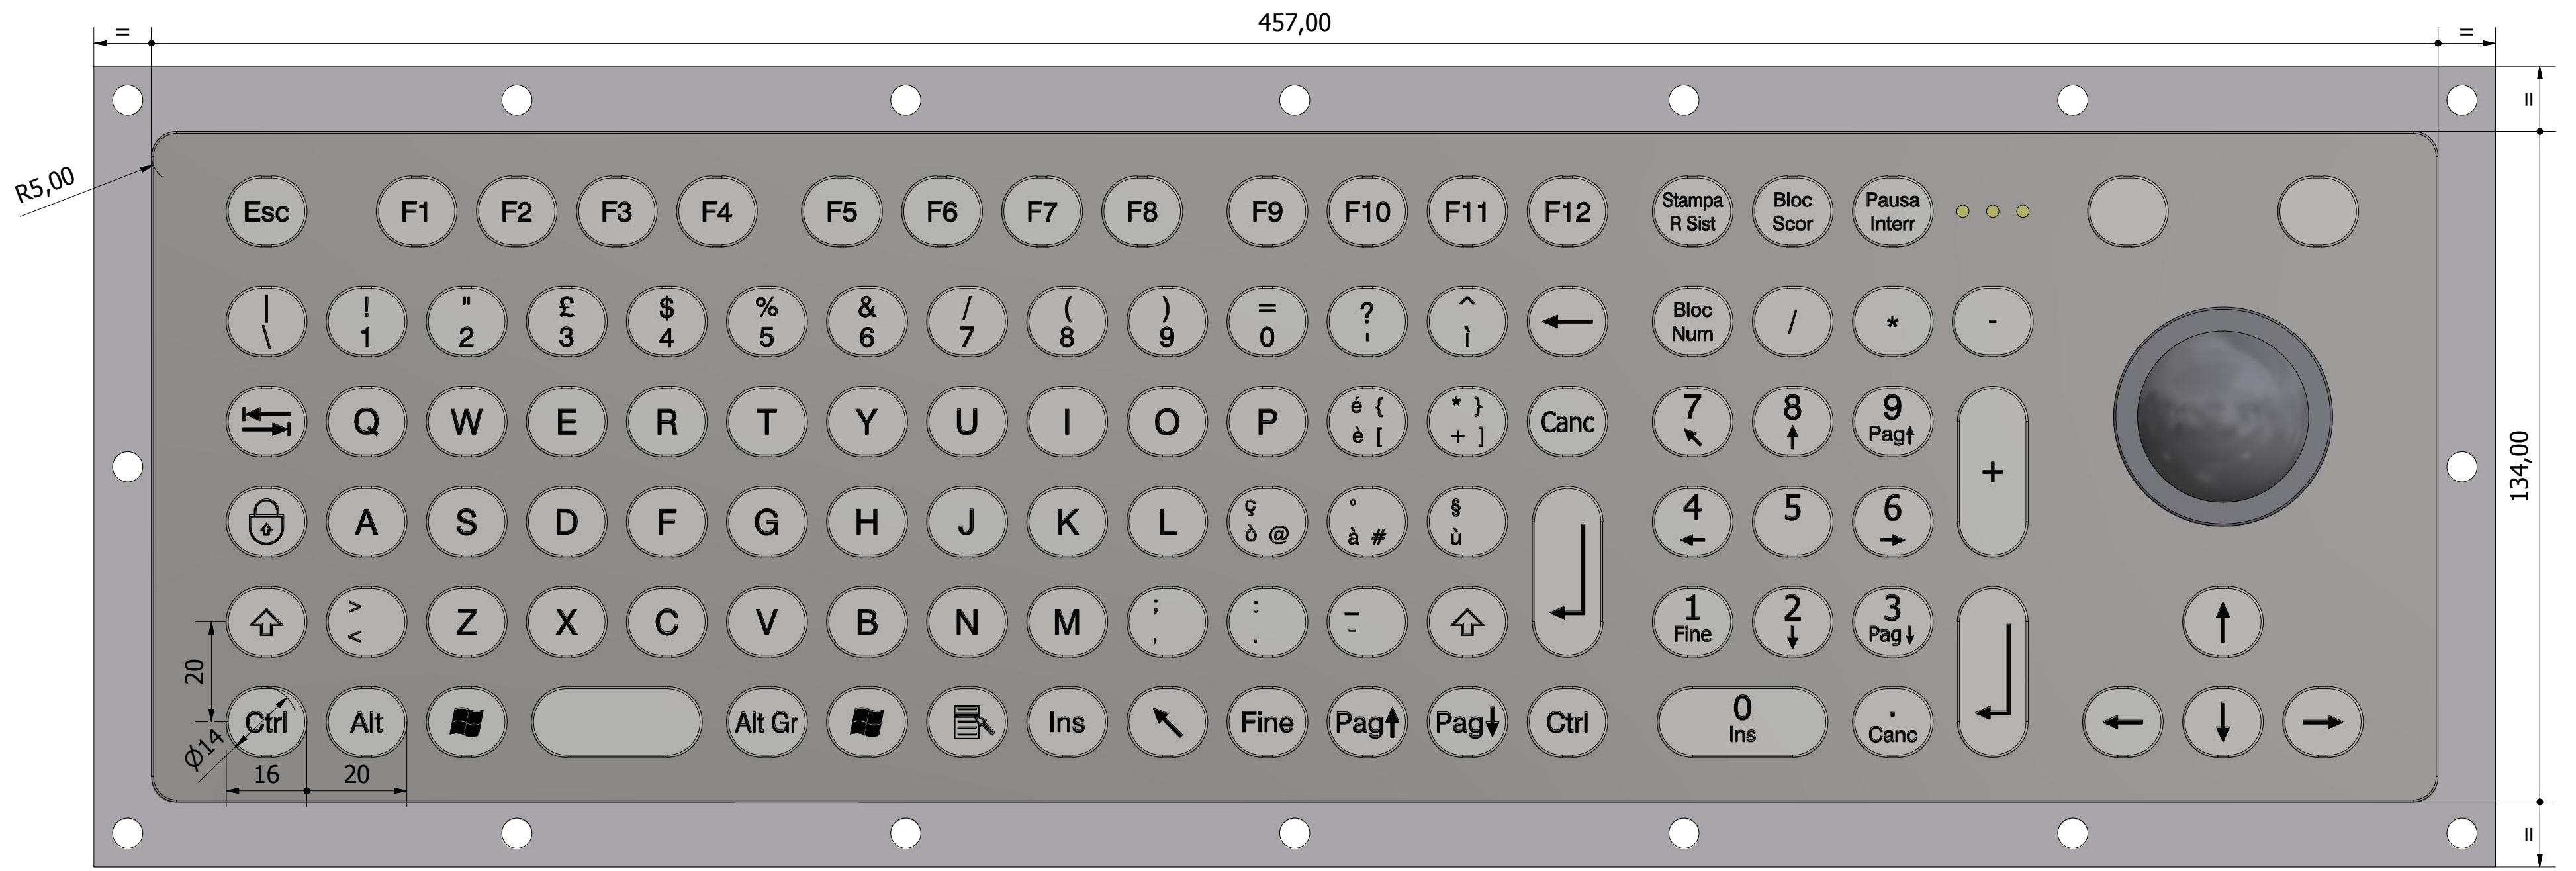

Grafos Steel S.r.l. Via Treves 19/21 41043 Formigine (MO) ITALY Tel. +39.059.57.50.267 www.grafossteel.it		Title: Fit Inox keyboard; 105 buttons (E16 keycap); rear mount; USB and PS/2 interface; stainless steel trackball	
P/N: FIT.105E16.R-TI		Rev: FIT.105E16.R-TI (data-sheet).idw	Drawn: A.Tosi
Date: 06/07/2015		ISO 2768 F	Approved:
Material:	Surface treatment:	Sheet: 1	Of: 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

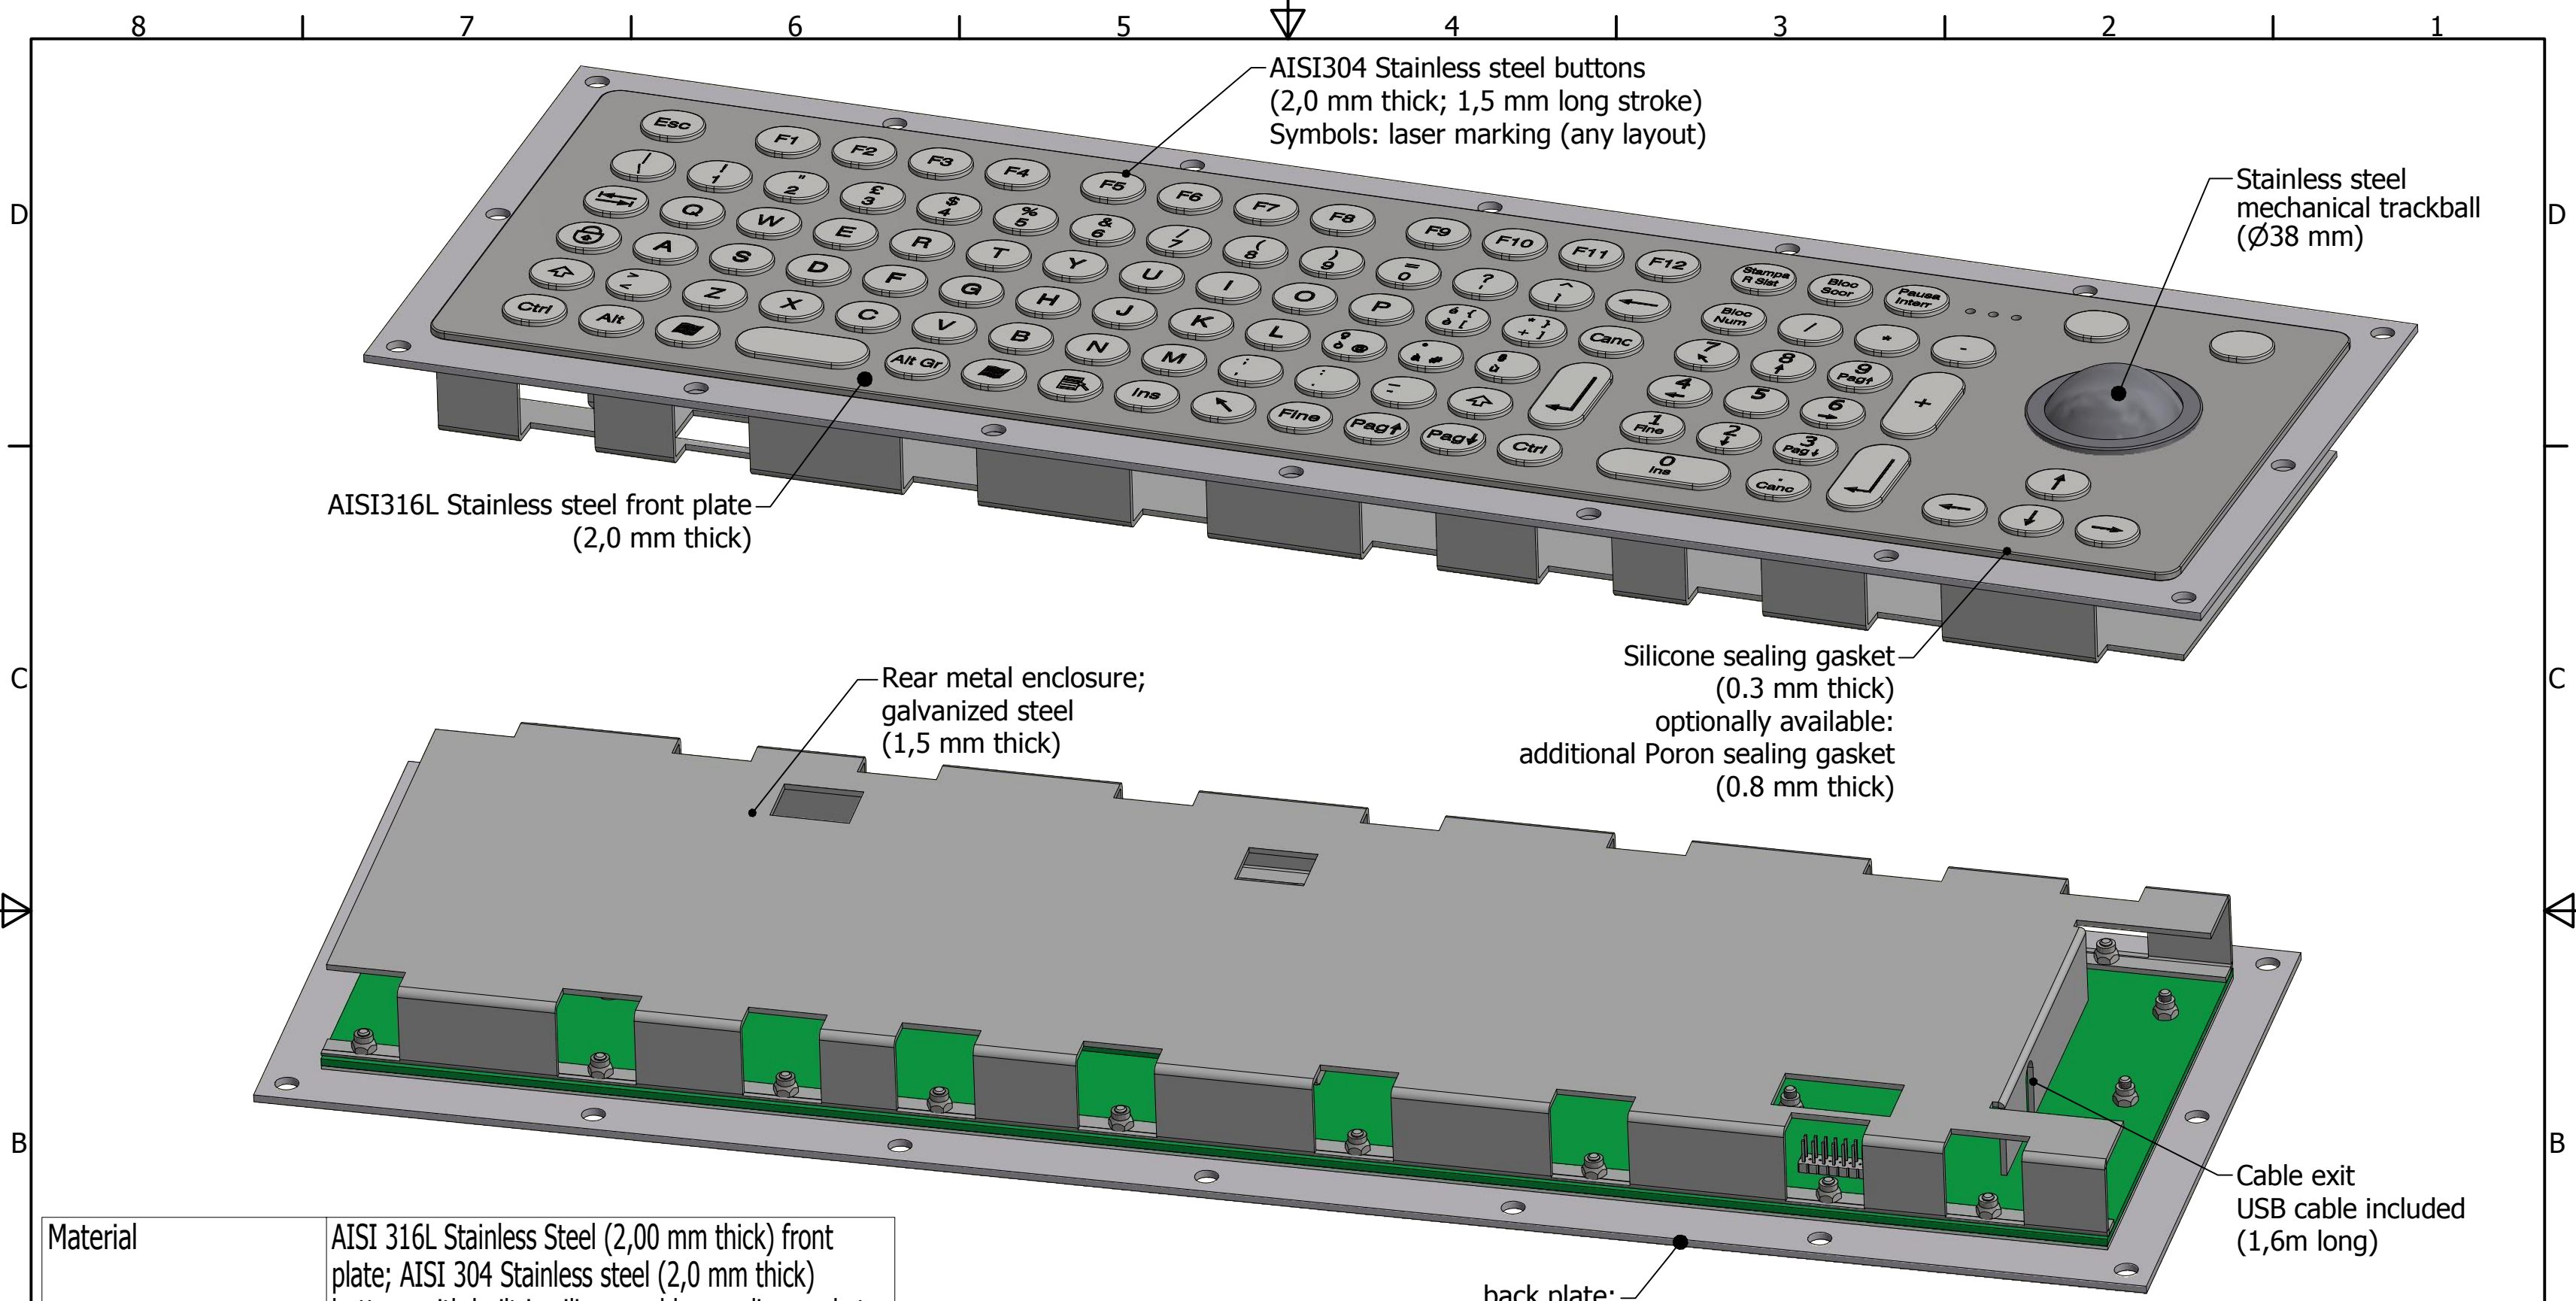

Material	AISI 316L Stainless Steel (2,00 mm thick) front plate; AISI 304 Stainless steel (2,0 mm thick) buttons with built-in silicone rubber sealing gasket
Lettering	Laser marking (any layout)
Button stroke	1,5 mm +/- 0,1 mm
Actuation force	1,5 N (typical)
Life expectancy	>2.000.000 cycles
IP Protection rate	IP65 (when ball is stationary); IP54 (when ball is rotating)
Impact Protection Rate	IK08
Contact technology	Conductive carbon pill on Gold plated PCB
Connection	USB
Operating temperature	0°/+50°C
Storage temperature	-25°/+55°C

Grafos Steel S.r.l. Via Treves 19/21 41043 Formigine (MO) ITALY Tel. +39.059.57.50.267 www.grafossteel.it		Title: Fit Inox keyboard; 105 buttons (E16 keycap); rear mount; USB and PS/2 interface; stainless steel trackball	
P/N: FIT.105E16.R-TI	Rev:	File: FIT.105E16.R-TI (data-sheet).idw	Drawn: A.Tosi
Date: 06/07/2015	Material: -	Surface treatment: -	Approved:
Material:		Surface treatment:	
-		-	
Date:		Sheet: 2	
06/07/2015		Of: 2	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

