


| | | | | | | | |
|--|--|---|--|---|--|--|--|
| Grafos Steel S.r.l. Via Treves 19/21 41043 Formigine (MO) ITALY Tel. +39.059.57.50.267 www.grafossteel.it | | Title: Fit Inox keyboard; 68 buttons (E16 keycap); front mount; USB+PS/2 interface; IP68 plastic trackball P/N: FIT.68E16.F-TL Dimensions without indicated tolerances - precision according to: ISO 2768 F | | File: FIT.68E16.F-TL (Data-sheet).idw Rev: Length (mm) Tolerance class C (Coarse) ±0.2 ±0.5 ±0.8 ±1.2 M (medium) ±0.1 ±0.2 ±0.3 ±0.5 F (Fine) ±0.05 ±0.1 ±0.15 ±0.2 | | Drawn: A. Tosi Approved: Sheet: 1 Of: 2 | |
|--|--|---|--|---|--|--|--|

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

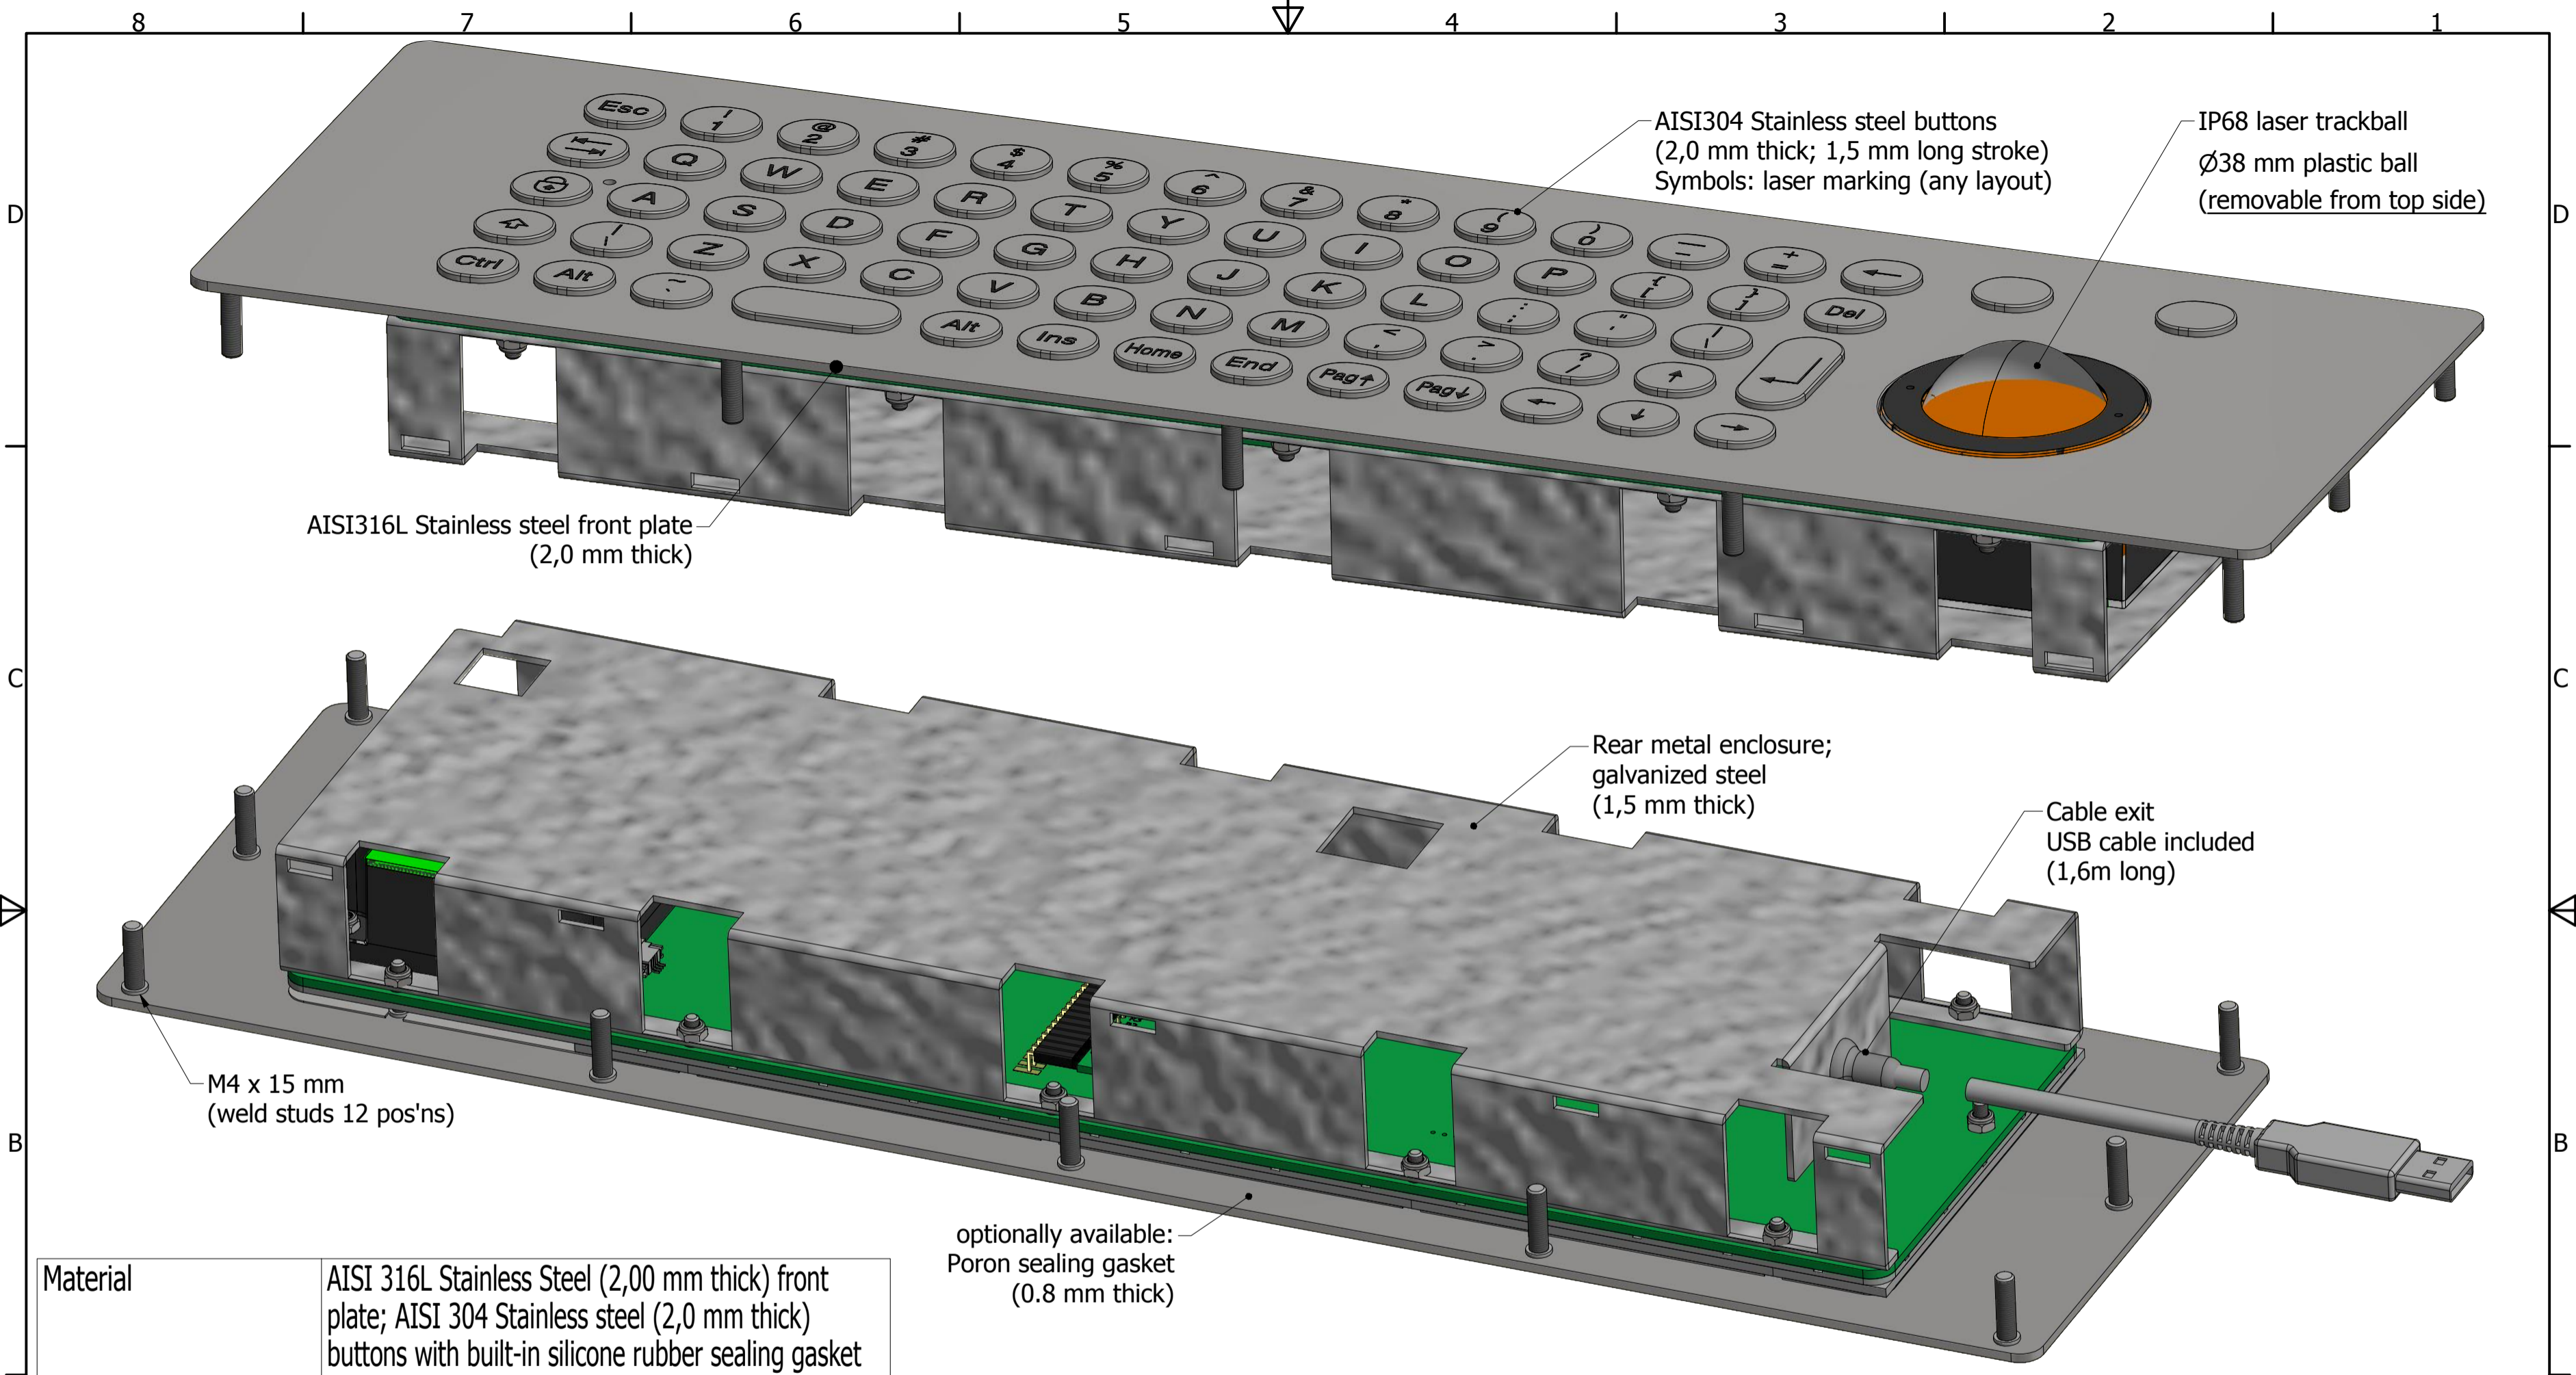

| | |
|------------------------|---|
| Material | AISI 316L Stainless Steel (2,00 mm thick) front plate; AISI 304 Stainless steel (2,0 mm thick) buttons with built-in silicone rubber sealing gasket |
| Lettering | Laser marking (any layout) |
| Button stroke | 1,5 mm +/- 0,1 mm |
| Actuation force | 1,5 N (typical) |
| Life expectancy | >2.000.000 cycles |
| IP Protection rate | IP65 |
| Impact Protection Rate | IK08 |
| Contact technology | Conductive carbon pill on Gold plated PCB |
| Connection | USB |
| Operating temperature | 0°/+55°C |
| Storage temperature | -25°/+55°C |

optionally available:
Poron sealing gasket
(0.8 mm thick)

Grafos Steel S.r.l.
Via Treves 19/21
41043 Formigine (MO) ITALY
Tel. +39.059.57.50.267
www.grafossteel.it

Date: 28/12/2016

Material: -

Surface treatment: -

Title: Fit Inox keyboard; 68 buttons (E16 keycap); front mount; USB+PS/2 interface; IP68 plastic trackball

P/N: **FIT.68E16.F-TL**

Rev: -

File: FIT.68E16.F-TL (Data-sheet).idw

| | | | | | |
|-----------------|-------------|-------|---------|----------|------|
| Tolerance class | Lenght (mm) | | | | |
| | >0 - 6 | >6-30 | >30-120 | >120-400 | |
| | C (Coarse) | ±0.2 | ±0.5 | ±0.8 | ±1.2 |
| | M (medium) | ±0.1 | ±0.2 | ±0.3 | ±0.5 |
| F (Fine) | ±0.05 | ±0.1 | ±0.15 | ±0.2 | |

Dimensions without indicated tolerances - precision according to: **ISO 2768 F**

Drawn: A. Tosi

Approved:

Sheet: 2 Of: 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS