

# GRAFOS<sup>®</sup> steel

Master Touch

Data Sheet

## FIT.68E16.F-TP

Tastiera 68 tasti ellettici 16 mm a corsa lunga montaggio fronte pannello con trackpad  
*Front mounting long stroke 68 elliptical 16 mm keys keyboard with trackpad*

**(fit.inox)**  

IP	65 (54 with TI)
IK	08
Cycles	2.000.000
Operating temp.	-10° to +70°C (0° to +50°C with TI)
Storage temp.	-25° to +85°C (-25° to +55°C with TI)




Quick web link




[www.grafossteel.it](http://www.grafossteel.it)

Disegni Drawings

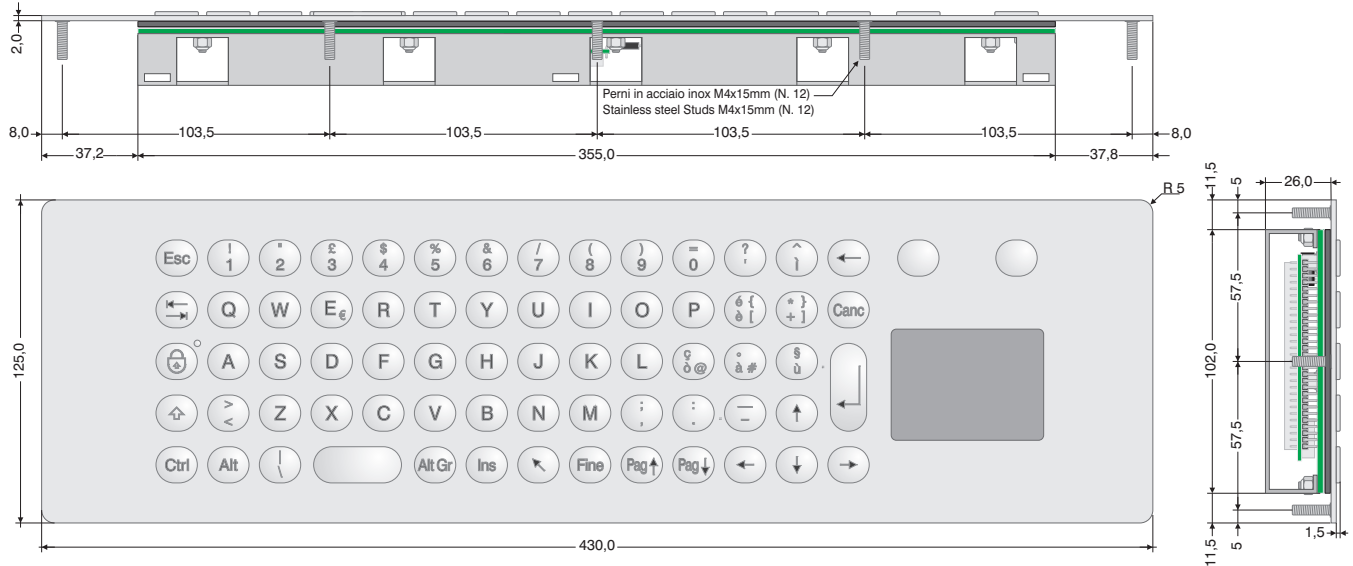

Cutout consigliato Suggested Cut-out

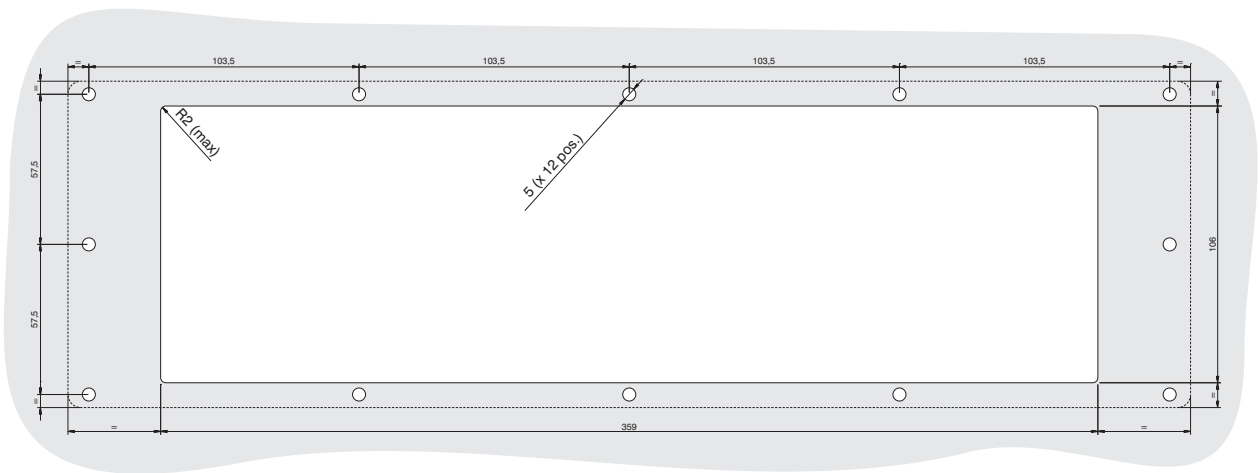

Codifica per l'ordine Order Info

FIT.68E16.F-TP- **y** -L- **z**

Es. FIT.68E16.F-TP-M-L-US

Marcatura Simboli / Marking Type  
L - Marcatura Laser / Laser marking

<b>y</b>	Connettore Connector	Lingua/layout Language layout	<b>z</b>
	M - MINIDIN PS2	US: QWERTY USA	
	U - USB	IT: QWERTY Italy	
		DE: QWERTY Germany	
		FR: AZERTY France	
		ES: Spain	