

GRAFOS[®] steel

Master Touch

Data Sheet

FIT.68E16.R-TI

Tastiera 68 tasti ellettici 16 mm a corsa lunga montaggio retro pannello con track-ball inox
Rear mounting long stroke 68 ellipticall 16 mm keys keyboard with stainless steel track-ball

(fit·inox)  

IP	65 (54 with TI)
IK	08
Cycles	2.000.000
Operating temp.	-10° to +70°C (0° to +50°C with TI)
Storage temp.	-25° to +85°C (-25° to +55°C with TI)




Quick web link




www.grafossteel.it

Disegni Drawings

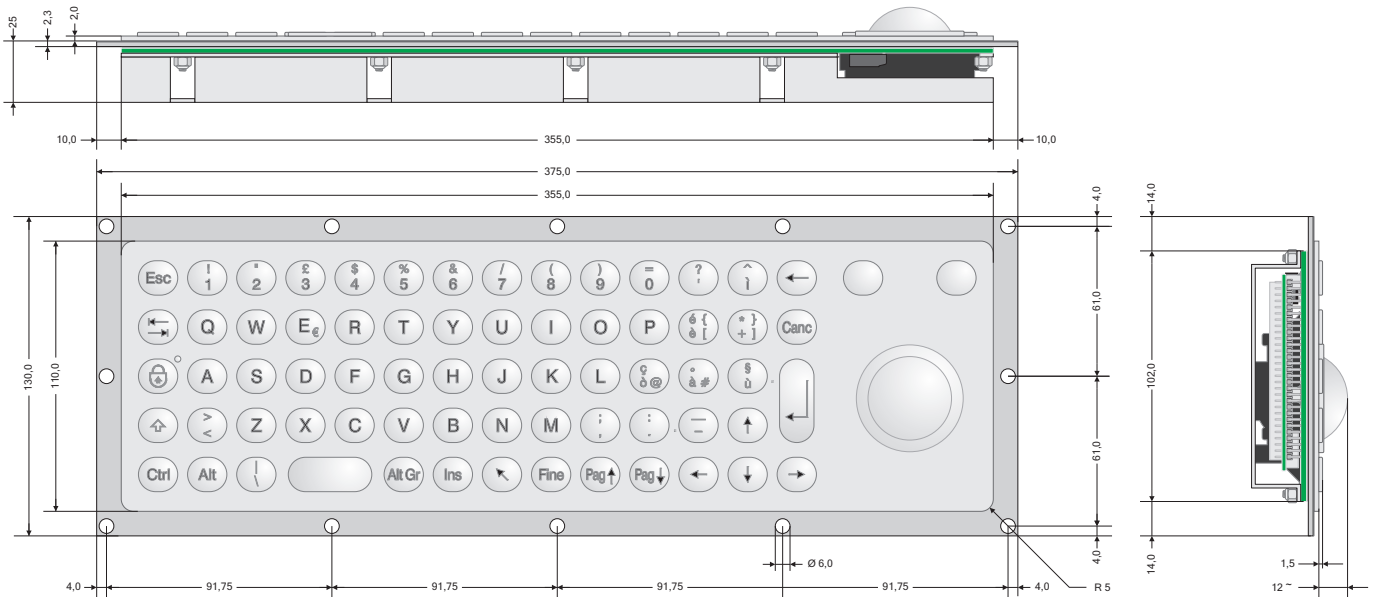

Cutout consigliato Suggested Cut-out

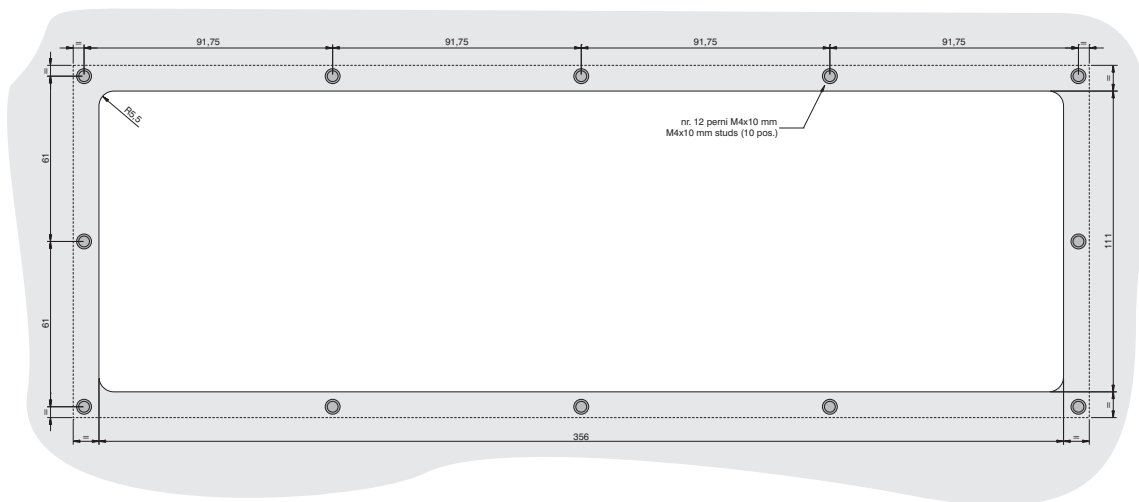

Codifica per l'ordine Order Info

FIT.68E16.R-TI-**y**-L-**z**

Es. FIT.68E16.R-TI-M-L-US

 Marcatura Simboli / Marking Type
L - Marcatura Laser / Laser marking

y	Connettore Connector	Lingua/layout Language layout	z
	M - MINIDIN PS2	US: QWERTY USA	
	U - USB	IT: QWERTY Italy	
		DE: QWERTY Germany	
		FR: AZERTY France	
		ES: Spain	