

Grafos Steel S.r.l.
 Via Treves 19/21
 41043 Formigine (MO) ITALY
 Tel. +39.059.57.50.267
 www.grafossteel.it

Date:
 20/01/2016

Material:
 -

Title:
 Digi Inox keyboard; 64 buttons (Q12 keycap); front mount; USB interface

P/N: **DGI.64Q12.F** Rev: File:
 DGI.64Q12.F (data-sheet).idw


Dimensions without indicated tolerances -
 precision according to:
ISO 2768 F

Tolerance class	Lenght (mm)			
	>0 - 6	>6-30	>30-120	>120-400
C (Coarse)	± 0.2	± 0.5	± 0.8	± 1.2
M (medium)	± 0.1	± 0.2	± 0.3	± 0.5
F (Fine)	± 0.05	± 0.1	± 0.15	± 0.2

Drawn:
A.Tosi

Approved:

Sheet: Of:
 1 2




UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS



AISI316L Stainless steel front plate
(2,0 mm thick)

AISI316L Stainless steel buttons
(1,5 mm thick)
Symbols: laser marking (any layout)

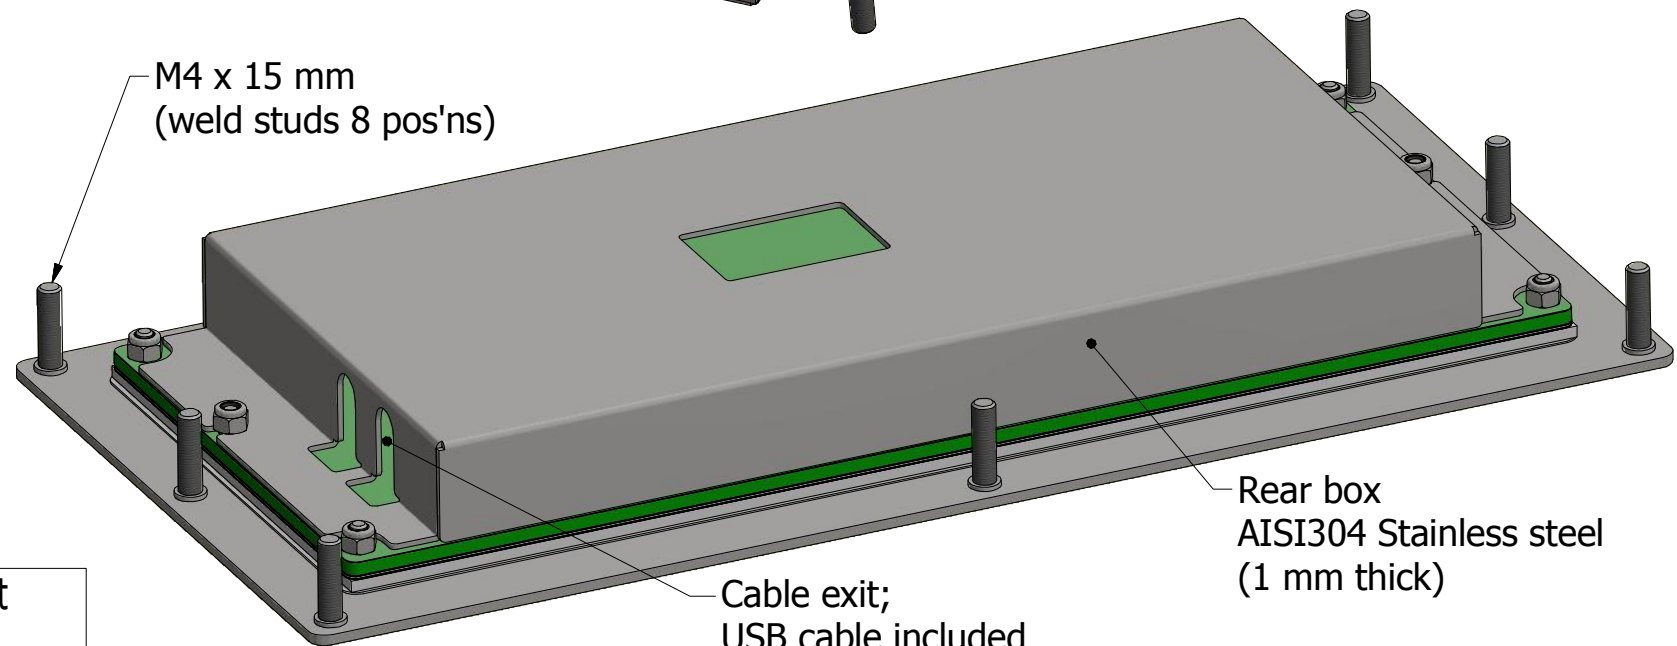

M4 x 15 mm
(weld studs 8 pos'ns)

Rear box
AISI304 Stainless steel
(1 mm thick)

Cable exit;
USB cable included
(1,6m long)

Material	AISI 316L Stainless Steel (2,00 mm thick) front plate; AISI 316L Stainless steel (1,5 mm thick) buttons with built-in silicone rubber sealing gasket
Lettering	Laser marking
Button stroke	0,6 mm +/- 0,1 mm
Actuation force	4,0 N (typical)
Life expectancy	>3.000.000 cycles
IP Protection rate	IP65
Contact technology	Stainless steel metal dome on Gold plated PCB
Connection	USB or PS/2
Operating temperature	-25°/+85°C
Storage temperature	-25°/+85°C

Grafos Steel S.r.l.
Via Treves 19/21
41043 Formigine (MO) ITALY
Tel. +39.059.57.50.267
www.grafossteel.it

Date:
20/01/2016

Material:
-

Title:
Digi Inox keyboard; 64 buttons (Q12 keycap); front mount; USB interface

P/N: **DGI.64Q12.F**

Dimensions without indicated tolerances -
precision according to:
ISO 2768 F


Rev: File:
DGI.64Q12.F (data-sheet).idw

Tolerance class	Lenght (mm)			
	>0 - 6	>6-30	>30-120	>120-400
C (Coarse)	± 0.2	± 0.5	± 0.8	± 1.2
M (medium)	± 0.1	± 0.2	± 0.3	± 0.5
F (Fine)	± 0.05	± 0.1	± 0.15	± 0.2

Drawn:
A. Tosi

Approved:

Sheet: 2 Of: 2



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS